

# RoscoLED® Tape Static White




## Vibrant, Versatile Lighting Solutions

RoscoLED Tape Static White is designed for the most demanding dramatic lighting applications. Each 5m reel of tape delivers an amazing volume of high-quality white light that can easily be incorporated into any project. All RoscoLED Tapes are pre-configured with a multi-pin male connector for easy plug-and-play installation using our RoscoLED Control Box – no soldering required. Each reel ships with a mating female connector with bare-end pigtailed for connection to optional, stand-alone power and dimming controls. All RoscoLED Tape is field cut-able, enabling completely customized installation.



### KEY FEATURES

- Excellent color quality: 93 CRI/92 TLCI
- Wide range of available color temperatures: 1800K to 5600K
- High output intensity: 1,000 lumens/meter
- Pre-configured multi-pin connector for plug-and-play connectivity

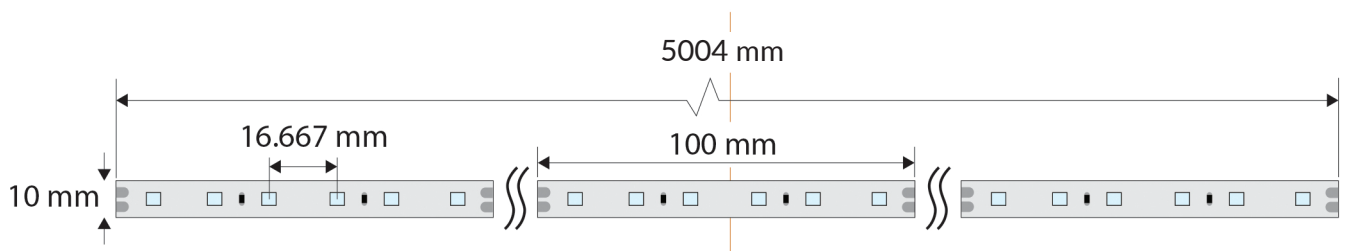

# RoscoLED® Tape Static White



## SPECIFICATIONS

|                       |   |                    |                                   |
|-----------------------|---|--------------------|-----------------------------------|
| LED Type:             | SMD2835   | Voltage:           | 24VDC                             |
| Number of LEDs/meter: | 60  | Power Consumption: | 14.4W/m or 72W/5m reel            |
| Cut Points:           | Every 100mm (3.94")                                       | Operating Temp:    | -4° F to 140° F (-20° C to 60° C) |
| Heat Sink:            | 3 oz Copper   | IP Rating:         | IP43 (IP65 by special order)      |
| Lumens/Meter:         | 1000  | Warranty:          | 3 years                           |
| Color Temperatures:   | 1800K / 2400K / 3000K / 5600K                             | Approvals:         | UL Listed                         |
| CRI:                  | 93  |                    | CE Certified                      |
| TLCI:                 | 92  |                    |                                   |
| Lumen Maintenance:    | > 47,000 hours L70 at 105° C<br>(IESNA LM-80-08 Standard) |                    |                                   |



| RoscoLED® Tape Static White |   |
|-----------------------------|---|
| Item Code                   | Description   |
| 293221100003                | RoscoLED Tape Static White: 1800K – 5m reel                       |
| 293221100004                | RoscoLED Tape Static White: 2400K – 5m reel                       |
| 293221100005                | RoscoLED Tape Static White: 3000K – 5m reel                       |
| 293221150005                | RoscoLED Tape Static White: 5600K – 5m reel                       |
| 293221106502                | RoscoLED Tape Static White: 1800K, IP65 – 5m reel (special order) |
| 293221106503                | RoscoLED Tape Static White: 2400K, IP65 – 5m reel (special order) |
| 293221106505                | RoscoLED Tape Static White: 3000K, IP65 – 5m reel (special order) |
| 293221156505                | RoscoLED Tape Static White: 5600K, IP65 – 5m reel (special order) |

| RoscoLED® Tape Static White Accessories |   |
|---|---|
| Item Code                               | Description   |
| 293222010001                            | RoscoLED 2-pin Static White Cable - 1M                        |
| 293222010002                            | RoscoLED 2-pin Static White Cable - 2M                        |
| 293222010003                            | RoscoLED 2-pin Static White Cable - 3M                        |
| 293222010005                            | RoscoLED 2-pin Static White Cable - 5M                        |
| 293222110000                            | RoscoLED 2-pin Static White Cable Splitter                    |
| 293222010006                            | RoscoLED 2-pin Static White Male Connector w/Pigtail, 20 cm   |
| 293222010007                            | RoscoLED 2-pin Static White Female Connector w/Pigtail, 20 cm |